




慈溪市美特弗机械有限公司 CIXI METEF MACHINERY CO.,LTD.

地址：浙江省慈溪市前应路1318号金汇大厦
ADD: JINHUI BUILDING, NO.1318, QIANYING ROAD,CIXI, ZHEJIANG
TEL: +86 574 63006565 63006566 FAX: +86 574 63006568
Email: info@metefmachinery.com
Http://www.metefmachinery.com





公司简介 Company Introduction

慈溪市美特弗机械有限公司，是一家轴承和塑料滑轮设计，制造的企业，现工厂主要生产微小型球轴承和家具建筑滑轮及各种非标准轴承，凭借专业化的生产设备，日益更新的技术，熟练的员工团队，公司为满足在不同工作环境的要求，定制客户产品。

METEF运用优质原材料，配备国内领先的生产设备包括内、外圈沟道超精机、高精度无心磨床，轴承注脂压盖自动线、超声波电子清洗机，高效节能注塑机等实现全面工厂化制造，整体流水，优化集成。METEF拥有专业的技术团队和完善的的产品检测设备，产品被广泛应用于机器，家用电器，电机，家具，建筑五金门窗，电梯以及物流行业等，产品主要销往欧美等国家，并拥有知名商标METEF。

CIXI METEF MACHINERY CO.,LTD. is specialized in bearing and plastic roller manufacturing, METEF mainly produces miniature & small ball bearing, furniture & construction roller, all kinds of special bearing etc. Under specialized equipment and rich experienced technology, we develop customized products ensures different application request from customer.

METEF uses high quality materials, equipped with leading production including inner & outer ring super finishing machine, grinding machine, auto assembling line, ultrasonic washing machine, plastic injection machine etc. to achieve a comprehensive manufacturing factory with integrated flow line and optimized structure. METEF has established a modern management system with advanced technology team and comprehensive inspection instruments to guarantee steady quality level, applied in machine, home appliance, motor, furniture, door & window, elevator, logistic etc. Products are sold world widely with METEF brand.

技术参数 Technical reference

向心轴承公差 Allowable tolerances of radial bearing （内圈 inner ring）

μm

精度等级 Accuracy class	d(mm)		△ dmp		VDp			Vdmp	Kia	Sia	Sd	△ Bs		VBs
			上偏差 Upper	下偏差 Lower	直径系列 Diameter Series							上偏差 Upper	下偏差 Lower	
	9	0.1			2.3.4									
	From	TO			max			max	max	max	max			max
P0	2.5	10	0	-8	10	8	6	6	10	-	-	0	-120	15
	10	18	0	-8	10	8	6	6	10	-	-	0	-120	20
	18	30	0	-10	13	10	8	8	13	-	-	0	-120	20
	30	50	0	-12	15	12	9	9	15	-	-	0	-120	20
	50	80	0	-15	19	19	11	11	20	-	-	0	-150	25
P6	2.5	10	0	-7	9	7	5	5	6	-	-	0	-120	15
	10	18	0	-7	9	7	5	5	7	-	-	0	-120	20
	18	30	0	-8	10	8	6	6	8	-	-	0	-120	20
	30	50	0	-10	13	10	8	8	10	-	-	0	-120	25
	50	80	0	-12	15	15	9	9	10	-	-	0	-150	5
P5	2.5	10	0	-5	5	4	4	3	4	7	7	0	-40	5
	10	18	0	-5	5	4	4	3	4	7	7	0	-80	5
	18	30	0	-6	6	5	5	3	4	8	8	0	-120	5
	30	50	0	-8	8	6	6	4	5	8	8	0	-120	5
	50	80	0	-9	9	7	7	5	5	8	8	0	-150	6

向心轴承公差 Allowable tolerances of radial bearing （外圈 outer ring）

μm

精度等级 Accuracy class	d(mm)		△ dmp		VDp				VDmp	Kea	Sea	SO	△ Cs	VCs
					直径轴承 Open bearing			直径系列 Capped bearing						
			上偏差 Upper	下偏差 Lower	直径系列 Diameter Series									
	9	0.1			2.3.4	2.3.4								
	From	TO	max				max	max	max	max	max			
P0	6	18	0	-8	10	8	6	10	6	15	-	-	与同一轴 承内圈的 △ Bs 相同	与同一轴 承内圈的 △ Bs 相同
	18	30	0	-9	12	9	7	12	7	15	-	-		
	30	50	0	-11	14	11	8	16	8	20	-	-		
	50	80	0	-13	16	13	9	20	10	25	-	-		
	80	120	0	-15	19	19	10	26	11	35	-	-		
P6	6	18	0	-7	9	7	5	9	5	8	-	-	与同一轴 承内圈的 △ Bs 相同	Same with △ Bs of in- ner ring of the same bear-ing
	18	30	0	-8	10	8	6	10	6	9	-	-		
	30	50	0	-9	11	9	7	13	7	10	-	-		
	50	80	0	-11	14	11	8	16	8	13	-	-		
	80	120	0	-13	16	16	10	20	10	18	-	-		
P5	6	18	0	-5	5	4	4	-	3	5	8	8	与同一轴 承内圈的 △ Bs 相同	5
	18	30	0	-6	6	5	5	-	3	6	8	8		5
	30	50	0	-7	7	5	5	-	4	7	8	8		5
	50	80	0	-9	9	7	7	-	5	8	10	8		6
	80	120	0	-10	10	8	8	-	5	10	11	9		8

技术参数 Technical reference

径向游隙 Radial Inter Clearance


轴承内径 Bearing bore(mm)		第二组 C2 group 2-C2		基本组 0 Standard group C ₀		第二组 C ₃ group 3-C ₃		第二组 C ₄ group 4-C ₄		第二组 C ₅ group 5-C ₅	
超过 from	到 TO	最小 min	最大 max	最小 min	最大 max	最小 min	最大 max	最小 min	最大 max	最小 min	最大 max
2.5	6	0	7	2	13	8	23	-	-	-	-
6	10	0	7	2	13	8	23	14	29	20	37
10	18	0	9	3	18	11	25	18	33	25	45
18	24	0	10	5	20	13	28	20	36	28	48
24	30	1	11	5	20	13	28	23	41	30	53
30	40	1	11	6	20	15	33	28	46	40	64

轴承振动 Bearing Vibration

轴承内径 Bearing bore (mm)	振动（加速度）Vibration(Acceleration) 单位：db															振动（速度）Vibration(Speed) 单位：u m/s											
	直径系列（0） Diameter series(0)					直径系列（2） Diameter Series（2）					直径系列（3） Diameter Series（3）					V ₁			V ₂			V ₃			V ₄		
	Z	Z1	Z2	Z3	Z	Z1	Z2	Z3	Z4	Z	Z1	Z2	Z3	Z4	低频 LOW frequency	中频 Medium frequency	高频 High frequency	低频 LOW frequency	中频 Medium frequency	高频 High frequency	低频 LOW frequency	中频 Medium frequency	高频 High frequency	低频 LOW frequency	中频 Medium frequency	高频 High frequency	
5	37	36	34	30	38	37	34	32	-	39	37	35	33	-	74	48	40	58	36	30	35	21	18	32	11	11	
6	37	36	34	30	38	37	34	32	-	39	37	35	33	-	74	48	40	58	36	30	35	21	18	32	11	11	
7	39	38	35	31	40	38	36	34	-	-	-	-	-	-	92	66	54	72	48	40	44	28	24	38	12	12	
8	39	38	35	31	40	38	36	34	-	-	-	-	-	-	92	66	54	72	48	40	44	28	24	38	12	12	
9	41	40	36	32	42	40	37	35	-	-	-	-	-	-	92	66	54	72	48	40	44	28	24	38	12	12	
10	43	42	38	33	44	42	39	35	30	46	44	40	37	32	120	80	70	90	60	50	55	35	30	45	14	14	
12	44	43	39	34	45	43	39	35	30	47	45	40	37	32	120	80	70	90	60	50	55	35	30	45	14	14	
15	45	44	40	35	46	44	41	36	31	48	46	42	38	33	150	110	85	110	78	60	65	46	35	52	18	18	
17	46	44	40	35	47	45	41	36	31	49	47	42	38	33	150	110	85	110	78	60	65	46	35	52	25	25	
20	47	45	41	36	48	46	42	38	33	50	48	43	39	34	180	125	100	130	100	75	80	60	45	60	30	32	
25	48	46	42	38	49	47	43	40	36	51	49	44	41	37	180	125	100	130	100	75	80	60	45	60	30	32	
28	49	47	43	39	50	48	44	41	37	52	50	45	42	38	180	125	100	130	100	75	80	60	45	60	35	40	
30	49	47	43	39	50	48	44	41	37	52	50	45	42	38	200	150	130	150	120	100	90	75	60	70	35	40	
32	50	48	44	40	51	49	45	42	38	53	51	46	43	39	200	150	130	150	120	100	90	75	60	70	35	40	
35	51	49	45	41	52	50	46	43	39	54	52	47	44	40	200	150	130	150	120	100	90	75	60	70	42	45	
40	53	51	46	42	54	52	47	44	40	56	54	49	45	41	240	180	160	180	150	130	110	90	80	82	50	50	
45	55	53	48	45	56	54	49	46	43	58	56	51	47	44	240	180	160	180	150	130	110	90	80	82	60	60	
50	57	54	50	47	58	55	51	48	45	60	57	53	49	46	280	200	200	210	160	160	125	100	100	95	70	70	



深沟球轴承
Deep groove ball bearing

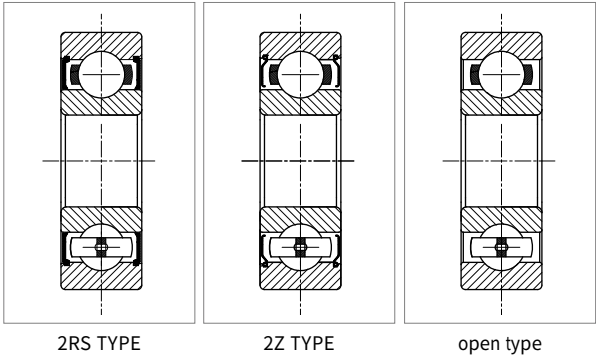

技术参数 Technical reference

外形尺寸 Boundary dimensions(mm)					轴承型号 Deep groove ball bearings		额定 动负荷 Basic dynamic load rating Cr(n)	额定 静负荷 Basic static load rating Cor(n)	极限转速 Limiting speed(min ⁻¹)			Mass (kg)		Bearing No.
d	D	B		r(min)	Open	Closed			Grease lubrication		Oil lubrication			
		Open	ZZ&2RS						Non contact	Contact		open	closed	
4	7	2	2.5	0.1	674	674-2Z-2RS	310	115	60000		67000	0.21	0.29	674
	8	2	3	0.1	MR84	MR84-2Z-2RS	395	139	56000		67000	0.33	0.56	MR84
	9	2.5	4	0.1	684	684-2Z-2RS	640	225	53000		63000	0.63	1.01	684
	10	3	4	0.15	MR104	MR104-2Z-2RS	585	204	48000		56000	0.95	1.33	MR104
	11	4	4	0.15	694	694-2Z-2RS	960	345	48000		56000	1.7	1.75	694
	12	4	4	0.2	604	604-2Z-2RS	960	345	48000		56000	2.25	2.29	604
	13	5	5	0.2	624	624-2Z-2RS	1300	485	40000		48000	2.97	3.04	624
	16	5	5	0.3	634	634-2Z-2RS	1340	515	36000		43000	5.21	5.24	634
5	8	2	2.5	0.1	675	675-2Z-2RS	310	120	53000		63000	0.24	0.34	675
	9	2.5	3	0.15	MR95	MR95-2Z-2RS	430	168	50000		60000	0.48	0.54	MR95
	10	3	4	0.15	MR105	MR105-2Z-2RS	430	168	50000		60000	0.91	1.29	MR105
	11	3	5	0.15	685	685-2Z-2RS	715	281	45000		53000	1.2	1.95	685
	13	4	4	0.2	695	695-2Z-2RS	1080	430	43000		50000	2.38	2.5	695
	14	5	5	0.2	605	605-2Z-2RS	1330	505	40000		50000	3.48	3.54	605
	16	5	5	0.3	625	625-2Z-2RS	1880	680	36000		43000	4.86	4.95	625
	19	6	6	0.3	625	625-2Z-2RS	2340	885	32000		40000	8.37	8.53	625
6	10	2.5	3	0.1	676	676-2Z-2RS	495	218	45000		53000	0.53	0.66	676
	12	3	4	0.15	MR126	MR126-2Z-2RS	715	292	43000		50000	1.20	1.70	MR126
	13	3.5	5	0.15	686	686-2Z-2RS	1080	440	40000		50000	1.90	2.64	686
	15	5	5	0.2	696	696-2Z-2RS	1340	515	40000		45000	3.72	3.79	696
	17	6	6	0.3	606	606-2Z-2RS	2260	835	38000		45000	5.94	6.08	606
	19	6	6	0.3	626	626-2Z-2RS	2340	885	32000		40000	7.97	8.15	626
	22	7	7	0.3	636	636-2Z-2RS	3300	1370	30000		36000	14.0	14.0	636
7	11	2.5	3	0.1	677	677-2Z-2RS	455	201	43000		50000	0.59	0.71	677
	13	3	4	0.15	MR137	MR137-2Z-2RS	540	276	40000		48000	1.50	1.98	MR137
	14	3.5	5	0.15	687	687-2Z-2RS	1170	510	40000		45000	2.10	2.97	687
	17	5	5	0.3	697	697-2Z-2RS	1610	710	36000		43000	5.01	5.26	697
	19	6	6	0.3	607	607-2Z-2RS	2340	885	36000		43000	7.54	7.67	607
	22	7	7	0.3	627	627-2Z-2RS	3300	1370	30000		36000	12.70	12.90	627
	26	9	9	0.3	637	637-2Z-2RS	4560	1980	28000		48000	24.00	25.00	637
8	12	2.5	3.5	0.1	678	678-2Z-2RS	545	275	40000		45000	0.68	0.95	678
	14	3.5	4	0.15	MR148	MR148-2Z-2RS	820	385	38000		43000	1.86	2.12	MR148
	16	4	5	0.2	688	688-2Z-2RS	1605	715	36000		43000	3.25	4.00	688
	19	6	6	0.3	698	698-2Z-2RS	2240	910	36000		40000	7.18	7.23	698
	22	7	7	0.3	608	608-2Z-2RS	3300	1370	34000		40000	12.10	12.20	608
	24	8	8	0.3	628	628-2Z-2RS	3350	1430	28000		34000	17.20	17.30	628
	28	9	9	0.3	638	638-2Z-2RS	4550	1970	28000		42000	28.30	28.60	638
9	14	3	4.5	0.1	679	679-2Z-2RS	920	465	36000		43000			679
	17	4	5	0.2	689	689-2Z-2RS	1330	665	36000		40000	3.53	4.43	689
	20	5	6	0.3	699	699-2Z-2RS	2470	1080	34000		38000	8.33	8.45	699
	24	7	7	0.3	609	609-2Z-2RS	3350	1430	32000		34000	14.50	14.60	609
	26	8	8	0.3	629	629-2Z-2RS	4550	1970	28000		30000	19.00	19.50	629
	30	10	10	0.6	639	639-2Z-2RS	4650	2070	24000			35.70	36.00	639
	19		5	0.3	61800	61800-2Z-2RS-2RZ-2ZL-2LS-2LZ	2120	985	37000	24000	44000	0.005		6800
10	22		6	0.3	61900	61900-2Z-2RS-2RZ-2ZL-2LS-2LZ	2490	1130	33000	22000	38000	0.009		6900
	26		8	0.3	6000	6000-2Z-2RS-2RZ-2ZL-2LS-2LZ	4550	1970	30000	22000	36000	0.019		6000
	30		9	0.6	6200	6200-2Z-2RS-2RZ-2ZL-2LS-2LZ	5100	2390	25000	18000	30000	0.032		6200
	35		11	0.6	6300	6300-2Z-2RS-2RZ-2ZL-2LS-2LZ	8100	3450	23000	17000	27000	0.053		6300
12	21		5	0.3	61801	61801-2Z-2RS-2RZ-2ZL-2LS-2LZ	1920	1040	32000	20000	39000	0.006		6801
	24		6	0.3	61901	61901-2Z-2RS-2RZ-2ZL-2LS-2LZ	2700	1320	30000	20000	36000	0.011		6901
	28		8	0.3	6001	6001-2Z-2RS-2RZ-2ZL-2LS-2LZ	5100	2390	28000	18000	32000	0.023		6001
	32		10	0.6	6201	63001-2Z-2RS-2RZ-2ZL-2LS-2LZ	6800	3050	22000	17000	28000	0.037		6201
	37		12	1.0	6301	6301-2Z-2RS-2RZ-2ZL-2LS-2LZ	9750	4250	20000	16000	24000	0.060		6301

外形尺寸 Boundary dimensions(mm)				轴承型号 Deep groove ball bearings		额定 动负荷 Basic dynamic load rating Cr(n)	额定 静负荷 Basic static load rating Cor(n)	极限转速 Limiting speed(min ⁻¹)			Mass (kg)	Bearing No.
d	D	B	r(min)	Open	Closed			Grease lubrication		Oil lubrication		
								Non contact	Contact			
15	24	5	0.3	61802	61802-2Z-2RS-2RZ-2ZL-2LS-2LZ	2080	1260	28000	17000	34000	0.007	6802
	28	7	0.3	61902	61902-2Z-2RS-2RZ-2ZL-2LS-2LZ	4300	2250	26000	17000	31000	0.016	6902
	32	9	0.3	16002	16002-2Z-2RS-2RZ-2ZL-2LS-2LZ	5600	2840	24000	-	28000	0.025	16002
	32	9	0.3	6002	6002-2Z-2RS-2RZ-2ZL-2LS-2LZ	5600	2840	24000	15000	28000	0.032	6002
	35	11	0.6	6202	6202-2Z-2RS-2RZ-2ZL-2LS-2LZ	7650	3700	20000	15000	24000	0.045	6202
	42	13	1.0	6302	6302-2Z-2RS-2RZ-2ZL-2LS-2LZ	11400	5400	17000	13000	21000	0.082	6302
17	26	5	0.3	61803	61803-2Z-2RS-2RZ-2ZL-2LS-2LZ	2630	1570	26000	15000	30000	0.008	6803
	30	7	0.3	61903	61903-2Z-2RS-2RZ-2ZL-2LS-2LZ	4600	2550	24000	15000	29000	0.018	6903
	35	8	0.3	16003	16003-2Z-2RS-2RZ-2ZL-2LS-2LZ	6000	3250	22000	-	26000	0.032	16003
	35	10	0.3	6003	6003-2Z-2RS-2RZ-2ZL-2LS-2LZ	6000	3250	22000	14000	26000	0.039	6003
	40	12	0.6	6203	6203-2Z-2RS-2RZ-2ZL-2LS-2LZ	9550	4800	18000	12000	21000	0.065	6203
	47	14	1.0	6303	6303-2Z-2RS-2RZ-2ZL-2LS-2LZ	13600	6550	16000	11000	19000	0.115	6303
20	32	7	0.3	61804	61804-2Z-2RS-2RZ-2ZL-2LS-2LZ	4000	2640	22000	13000	26000	0.019	6804
	37	9	0.3	61904	61904-2Z-2RS-2RZ-2ZL-2LS-2LZ	6350	3700	19000	12000	23000	0.036	6904
	42	8	0.3	16004	16004-2Z-2RS-2RZ-2ZL-2LS-2LZ	7900	4500	18000	-	21000	0.050	16004
	42	12	0.6	6004	6004-2Z-2RS-2RZ-2ZL-2LS-2LZ	9400	5000	18000	11000	21000	0.070	6004
	47	14	1.0	6204	6204-2Z-2RS-2RZ-2ZL-2LS-2LZ	12800	6600	16000	11000	18000	0.106	6204
	52	15	1.1	6304	6304-2Z-2RS-2RZ-2ZL-2LS-2LZ	15900	7900	14000	10000	17000	0.144	6304
22	50	14	1.0	62/22	62/22-2Z-2RS-2RZ-2ZL-2LS-2LZ	13900	6950	14000	9700	17000	0.120	62/22
	56	16	1.1	63/22	63/22-2Z-2RS-2RZ-2ZL-2LS-2LZ	18400	9250	13000	9500	16000	0.176	63/22
25	37	7	0.3	61805	61805-2Z-2RS-2RZ-2ZL-2LS-2LZ	4300	2940	18000	10000	22000	0.022	6805
	42	9	0.3	61905	61905-2Z-2RS-2RZ-2ZL-2LS-2LZ	7000	4500	16000	10000	20000	0.042	6905
	47	8	0.3	16005	16005-2Z-2RS-2RZ-2ZL-2LS-2LZ	6950	4600	15000	-	18000	0.060	16005
	47	12	0.6	6005	6005-2Z-2RS-2RZ-2ZL-2LS-2LZ	10100	5850	15000	9500	18000	0.079	6005
	52	15	1.0	6205	6205-2Z-2RS-2RZ-2ZL-2LS-2LZ	14000	7900	13000	9000	16000	0.128	6205
	62	17	1.1	6305	6305-2Z-2RS-2RZ-2ZL-2LS-2LZ	23600	12100	12000	8100	14000	0.232	6305
28	58	16	1.0	62/28	62/28-2Z-2RS-2RZ-2ZL-2LS-2LZ	17900	9750	12000	8200	14000	0.175	62/28
	68	18	1.1	63/28	63/28-2Z-2RS-2RZ-2ZL-2LS-2LZ	26800	14000	11000	7500	13000	0.287	63/28
30	42	7	0.3	61806	61806-2Z-2RS-2RZ-2ZL-2LS-2LZ	5350	3800	15000	9000	18000	0.026	6806
	47	9	0.3	61906	61906-2Z-2RS-2RZ-2ZL-2LS-2LZ	7250	5000	14000	8500	17000	0.045	6906
	55	9	0.3	16006	16006-2Z-2RS-2RZ-2ZL-2LS-2LZ	9950	6550	13000	-	15000	0.085	16006
	55	13	1.0	6006	6006-2Z-2RS-2RZ-2ZL-2LS-2LZ	13200	8300	13000	8000	15000	0.117	6006
	62	16	1.0	6206	6206-2Z-2RS-2RZ-2ZL-2LS-2LZ	19500	11300	11000	7500	13000	0.199	6206
	72	19	1.1	6306	6306-2Z-2RS-2RZ-2ZL-2LS-2LZ	26700	15000	10000	6700	12000	0.346	6306
32	65	17	1.0		-2Z-2RS-2RZ-2ZL-2LS-2LZ	22400	13100	11000	7100	12000	0.230	62/32
	75	20	1.1		-2Z-2RS-2RZ-2ZL-2LS-2LZ	30000	16200	9500	6500	11000	0.382	63/32
35	47	7	0.3	61807	61807-2Z-2RS-2RZ-2ZL-2LS-2LZ	4750	3800	14000	7600	16000	0.029	6807
	55	10	0.6	61907	61907-2Z-2RS-2RZ-2ZL-2LS-2LZ	10400	7150	12000	7500	15000	0.073	6707
	62	9	0.3	16007	16007-2Z-2RS-2RZ-2ZL-2LS-2LZ	11700	8150	12000	-	14000	0.110	16007
	62	14	1.0	6007	6007-2Z-2RS-2RZ-2ZL-2LS-2LZ	16000	10300	12000	6800	14000	0.156	6007
	72	17	1.1	6207	6207-2Z-2RS-2RZ-2ZL-2LS-2LZ	25700	15300	9800	6300	11000	0.288	6207
	80	21	1.5	6307	6307-2Z-2RS-2RZ-2ZL-2LS-2LZ	33500	19200	8800	6000	10000	0.457	6307
40	52	7	0.3	61808	61808-2Z-2RS-2RZ-2ZL-2LS-2LZ	5950	4900	12000	6700	14000	0.033	6808
	62	12	0.6	61908	61908-2Z-2RS-2RZ-2ZL-2LS-2LZ	13700	9950	11000	6300	13000	0.108	6908
	68	9	0.3	16008	16008-2Z-2RS-2RZ-2ZL-2LS-2LZ	11100	8550	10000	-	12000	0.125	16008
	68	15	1.0	6008	6008-2Z-2RS-2RZ-2ZL-2LS-2LZ	16800	11500	10000	6100	12000	0.194	6008
	80	18	1.1	6208	6208-2Z-2RS-2RZ-2ZL-2LS-2LZ	29100	17900	8700	5600	10000	0.366	6208
	90	23	1.5	6308	6308-2Z-2RS-2RZ-2ZL-2LS-2LZ	40500	24100	7800	5300	9200	0.633	6308
45	58	7	0.3	61809	61809-2Z-2RS-2RZ-2ZL-2LS-2LZ	5350	4900	11000	6000	13000	0.040	6809
	68	12	0.6	61909	61909-2Z-2RS-2RZ-2ZL-2LS-2LZ	14100	10900	10000	5600	12000	0.122	6909
	75	10	0.6	16009	16009-2Z-2RS-2RZ-2ZL-2LS-2LZ	12900	10600	9200	-	11000	0.170	16009
	75	16	1.1	6009	6009-2Z-2RS-2RZ-2ZL-2LS-2LZ	20900	15200	9200	5400	11000	0.246	6009
	85	19	1.1	6209	6209-2Z-2RS-2RZ-2ZL-2LS-2LZ	32500	20500	7800	5300	9300	0.407	6209
	100	25	2.0	6309	6309-2Z-2RS-2RZ-2ZL-2LS-2LZ	53000	32000	7000	4800	8200	0.833	6309
50	65	7	0.3	61810	61810-2Z-2RS-2RZ-2ZL-2LS-2LZ	6400	5800	10000	5300	12000	0.052	6810
	72	12	0.6	61910	61910-2Z-2RS-2RZ-2ZL-2LS-2LZ	14500	11700	9500	5300	11000	0.125	6910
	80	10	0.6	16010	16010-2Z-2RS-2RZ-2ZL-2LS-2LZ	16100	13100	8500	-	10000	0.180	16010
	80	16	1.0	6010	6010-2Z-2RS-2RZ-2ZL-2LS-2LZ	21800	16600	8500	5000	10000	0.264	6010
	90	20	1.1	6210	6210-2Z-2RS-2RZ-2ZL-2LS-2LZ	35000	23200	7100	4800	8600	0.463	6210
	110	27	2	6310	6310-2Z-2RS-2RZ-2ZL-2LS-2LZ	62000	3800	6400	4300	7500	1.07	6310
55	72	9	0.3	61811	61811-2Z-2RS-2RZ-2ZL-2LS-2LZ	8800	8100	8700	-	10000	0.083	6811
	80	13	1.0	61911	61911-2Z-2RS-2RZ-2ZL-2LS-2LZ	16000	13200	8200	-	9600	0.177	6911
	90	11	0.6	16011	16011-2Z-2RS-2RZ-2ZL-2LS-2LZ	15200	13200	7700	-	9000	0.260	16011
	90	18	1.1	6011	6011-2Z-2RS-2RZ-2ZL-2LS-2LZ	28300	21300	7700	4500	9000	0.384	6011
	100	22	1.5	6211	6211-2Z-2RS-2RZ-2ZL-2LS-2LZ	43500	29300	6400	4300	7700	0.607	6211
	120	31	2.0	6311	6311-2Z-2RS-2RZ-2ZL-2LS-2LZ	71500	44500	5800	4000	6800	1.37	6311

塑料滑轮 Plastic roller




家具塑料滑轮 Plastic roller for furniture



型号	D	d	A	B	E	R
PLA1101	22	6	7.5	6	8.2	7
PLA1102	25	6	7.5	6	8.2	7
PLA1103	27	6	8.25	7	9.1	5.78
PLA1104	30	5.5	7.5	5.5	7.5	3.78
PLA1105	30	6	7.5	6	9	7
型号	D	d	A	B	E	R
PLA1201	21	5	7	6	18	1.5
PLA1202	30	8	8	7	25	
PLA1203	45	8	13	10.5	39	3.1
PLA1204	45	8	13	11.5	39	3.6
PLA1205	45	10	18.4	15	37	4.3
型号	D	d	A	B	E	R
PLA1301	23	5	8.5	7.5	19.5	2.75
PLA1302	25	6	9	7.5	19.5	2.75
PLA1303	25	6	11	10	19	3.1
PLA1304	30	6	11	10	24	3.1
PLA1305	45	8	12.25	11.5	39	3.1
型号	D	d	A	B	E	R
PLA1401	25	5	7.8	5	20	2.5
PLA1402	30	8	10	7	25	3
PLA1403	32.5	8	9.5	7	26.5	2.6
PLA1404	34	8	10	7	25	3
PLA1405	38.5	8	12.2	7		
PLA1406	45	8	11.7	7	39	3
PLA1407	45	12	11.5	8	39	3.2
PLA1408	47.8	8	11	7	41	3.1
型号	D	d	A	B	E	R
PLA1501	20	5	5.6	5		
PLA1502	20	5	6.1	5		
PLA1503	32	5	6.2	5		3.1
PLA1504	35	5	6.2	5		3.1




型号	D	d	A	B	E	C
PLA1601	25.3	5	8	5	20.4	
PLA1602	32.5	8	7.6	7	28	2.6
PLA1603	35	8	8.2	7	25.9	2.5
PLA1604	39	6	9	8	34	2.8
PLA1605	55	8	7.6	7	48.5	3
PLA1606	44.5	8	7.6	7	37.5	
型号	D	d	A	B	E	R
PLA1701	21	5	7.5	6	18	1.5
PLA1702	24	5	8.75	7	20	2.5
PLA1703	25	6	9	7	19.5	2.75

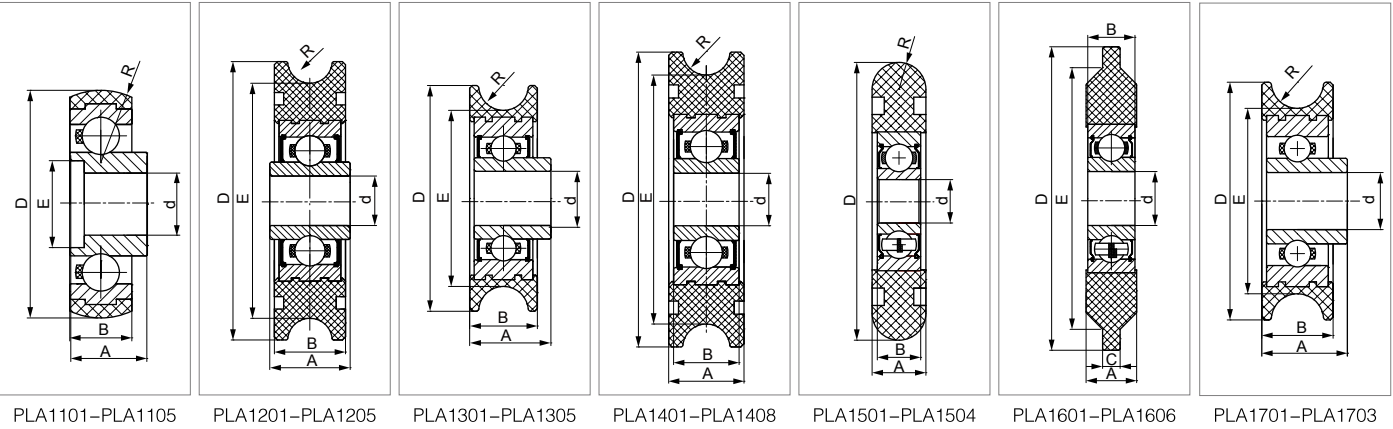



型号	D	d	A	B	E	R
PLA1801	35	6	10.7	5	10	5
PLA1802	18	5.8	8	7	7.86	6
PLA1803	17.7	4.05	6	5	6.7	8.3
PLA1804	16.8	3.95	8.2	7	6.7	8

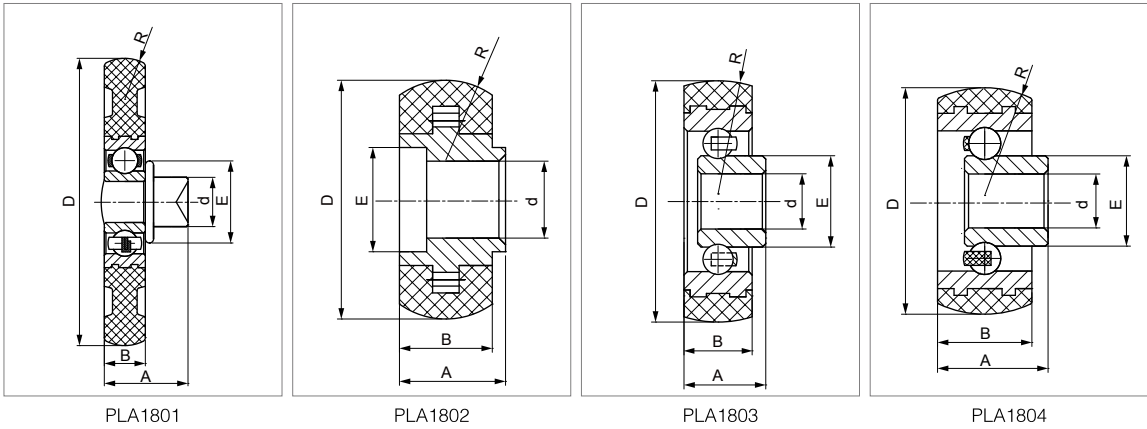


抽屉塑料滑轮 Plastic roller for drawer



型号	D	M	B	C	L	E
PLA2101	19	M6xP1.0	6	1.5	8	8
PLA2102	19	M6xP1.0	6	3.5	8	8
PLA2103	22	M6xP1.0	7	0.5	8	9.5
PLA2104	22	M6xP1.0	7	1	10	9.5
PLA2105	22	M6xP1.0	7	3	10.5	9.5
PLA2106	24	M6xP1.0	7	0.5	8	9.5

型号	D	d	B	C	L	E
PLA2201	19	5	6	0.5	3.5	8
PLA2202	22	6	7	2	3.5	9.5

型号	D	d	B	C	L	E
PLA2301	19	4.6	6.3	2.5	6.3	10.5
PLA2302	22	4.6	6.3	2.5	6.3	10.5

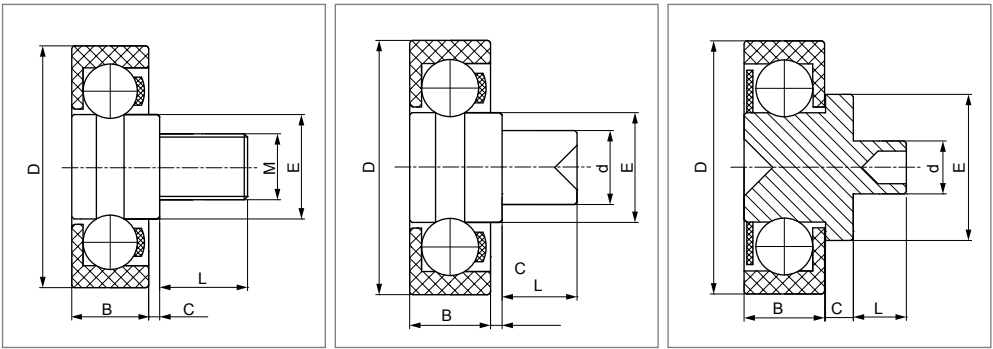

PLA2101-PLA2106


PLA2201-PLA2202

PLA2301-PLA2302


卫浴塑料滑轮 Plastic roller for shower cabinet




型号	D	M	A	B	C	R
PLA3101	18	M4	11	5		2.5
PLA3102	19	M4	7.5	5		5
PLA3103	19	M4	12.3	6		4
PLA3104	25	6	8	6		3
PLA3105	25	6	10	6		3
PLA3201	19	M4	11.5	6		
PLA3202	22	6	8.75	6		
PLA3203	28	6	7	6		
PLA3301	19	M5	10	6	17	4
PLA3302	20	M5	9	5.6	15.7	3.5
PLA3303	24	M6	8.5	7	15	7.5
PLA3304	25	M6	8	6	12.5	3
PLA3401	19.4	M5	25	6	15	2
PLA3402	19.4	M5	22.5	6	15	2
PLA3501	19.4	M5	28.5	6	15	2
PLA3502	19.4	M5	30.5	6	15	2




PLA3101-PLA3105




PLA3201-PLA3203



PLA3301-PLA3304



PLA3401-PLA3402



PLA3501-PLA3502

门窗用塑料滑轮 Plastic roller for door & window




型号	D	d	A	B	E	a
PLA4101	21.7	6	12	9	20	156°
PLA4102	22	6	13.3	9	20	150°
PLA4103	25	7	13	11	23	156°
PLA4104	26.8	6	12	11	25	156°
PLA4105	27	6	12	11.7	25.5	164°
PLA4106	30	7	13	11.5	27.7	156°

型号	D	d	A	B	E	R
PLA4201	15	3	6	5	12	1.8
PLA4202	20	4	8	7	17	2.25
PLA4203	20.5	4	6.5	5	17.5	2.42
PLA4204	24	5.5	10.1	8	20	2.2
PLA4205	29	6.05	11	8	24	2.5
PLA4206	30	5	11	8	26	2.0
PLA4207	32	6	11	9.5	27	2.5
PLA4208	38	7	10	8	32	3.0
PLA4209	44	8.05	12.2	10	39	2.5


型号	D	d	A	B	E	R
PLA4301	24	6	12	7	20	2.5
PLA4302	24	6	12	6	21	2.5
PLA4303	29	8	18.2	11	26	4

型号	D	d	A	B	E	a
PLA4401	21	6	13.6	8	19	150°
PLA4402	21.7	5.9	14	7	20	150°
PLA4403	21.8	6	15.5	9	20	156°
PLA4404	29.1	8	18.2	12	27	150°


型号	D	d	A	B	E	a
PLA4501	21	4	11	7	19	120°
PLA4502	22	6	13.5	7.7	19.5	77°

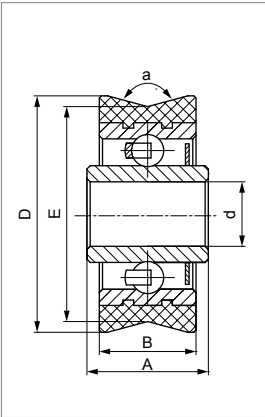


PLA4101-PLA4106

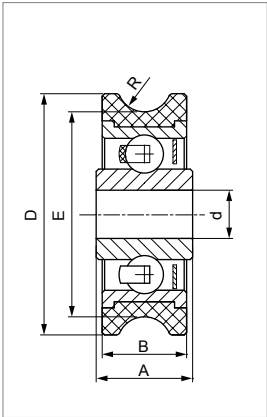


PLA4201-PLA4209

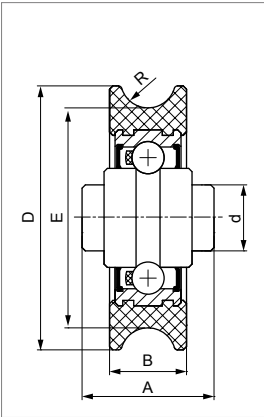

PLA4301-PLA4303

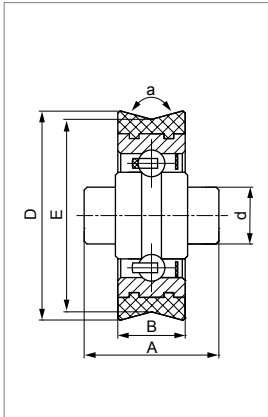

PLA4401-PLA4404

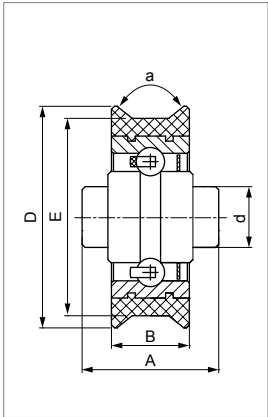

PLA4501-PLA4502

电梯塑料滑轮 Plastic roller for elevator



型号	D	d	A	B	E	R	a
PLA5101	54	10	18.7	11	46	1.7	50°
PLA5102	56	8	14.5	8	50	2	30°
PLA5103	56	10	33.7	15	48	3.75	90°
PLA5104	56	12	24	15	48	3.75	90°


型号	D	d	A	B	E	R	M	a
PLA5201	29	7	29.3	13.5	23	6.5	M10	
PLA5202	48	10	29.5	15.5	43	5	M10	110°
PLA5203	48	15	27	14	41	3.75	M12	90°
PLA5204	56	12	31	15	48	3.75	M10	90°

型号	D	d	A	B	E	R
PLA5301	80	10	11	9	72	1.5
PLA5302	90	10	11	9	80	1.5


型号	D	d	A	B	E	M	L	R
PLA5401	44.4	10	31.8	17	38	M10	10.4	
PLA5402	54	17	35.75	17.5	50	M12	13.5	
PLA5403	56	17	32.75	17.5	50	M12	11	5.0
PLA5404	59.3	15	32	17	50	M10	10.4	

型号	D	d	A	B	E	M	a	R
PLA5501	47	10	13.8	8.7	41	M6	52°	1.5
PLA5502	67.5	15	19.25	15.5	60	M10	90°	3.5
PLA5503	90	17	26.5	21	80	M10	90°	7


型号	D	d	A	B	E	R	a
PLA5601	47	6.04	10	8	42	1.6	80°
PLA5602	60	6.55	10.5	9	54	1.5	45°

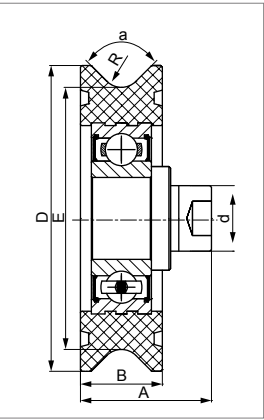

PLA5100-PLA5104

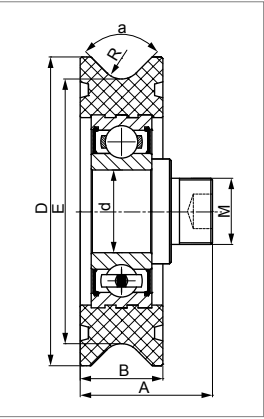

PLA5201 - PLA5204

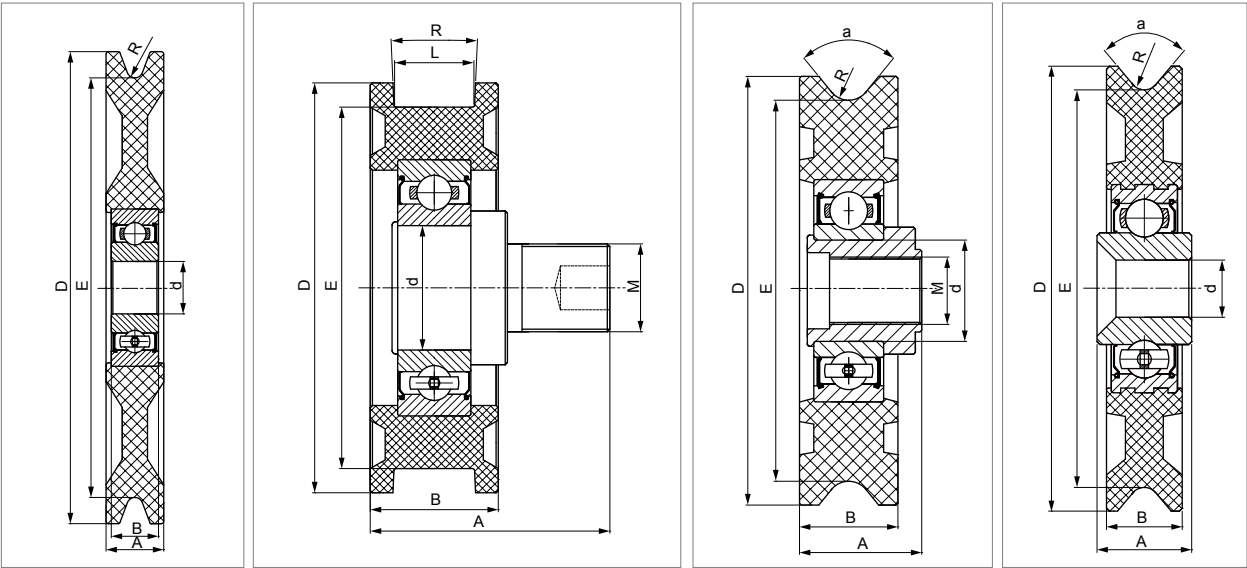

PLA5301-PLA5302

PLA5401-PLA5404

PLA5501-PLA5503

PLA5601-PLA5602

物流塑料滑轮 Plastic roller for logistic application



非标准轴承（车削轴承）Special bearing (turning bearing)




物流用车削轴承 Special bearing for logistic application

型号	D	d	A	B	E	
TUR1101	22	6	7.5	6	10	
TUR1102	24	6	10.5	6	11	
TUR1103	25	6	10	7	10.5	
TUR1104	32	8	12.4	9	13.9	


型号	D	d	A	B	E	R
TUR1201	23.9	7	8	7	12	12
TUR1202	48	12	18.5	12	18	

型号	D	d	A	B	E	R
TUR1301	25	6.05	11	6	8.6	3.5

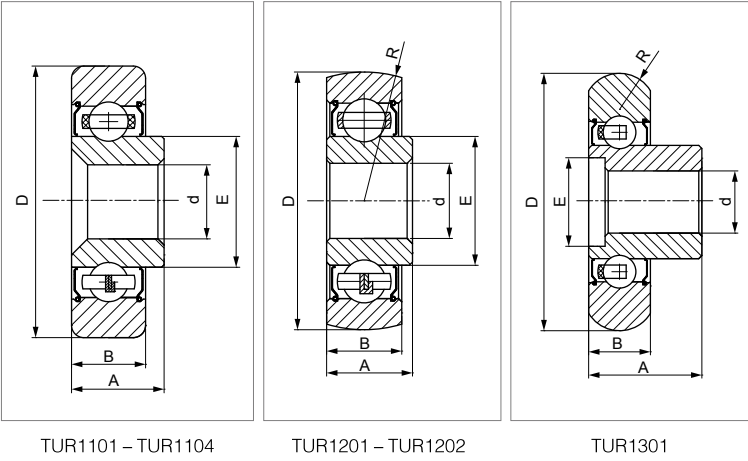


双内圈轴承 Double inner ring bearing


型号	D	d	A	B	E
TUR2101	35	8	15	12	25
TUR2102	45	10	15	12	25
TUR2103	52	8	21	17	25
TUR2104	55	10	21	21	22.3
TUR2105	58	5	15	12	25
TUR2106	58	10	15	12	25
TUR2107	70	8	15	12	25

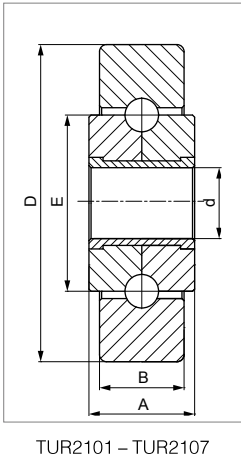

磨加工非标准轴承 Special bearing (grinding bearing)

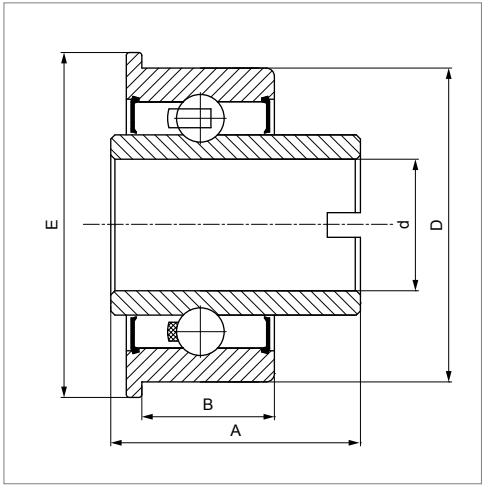

GRI1101 – GRI1103

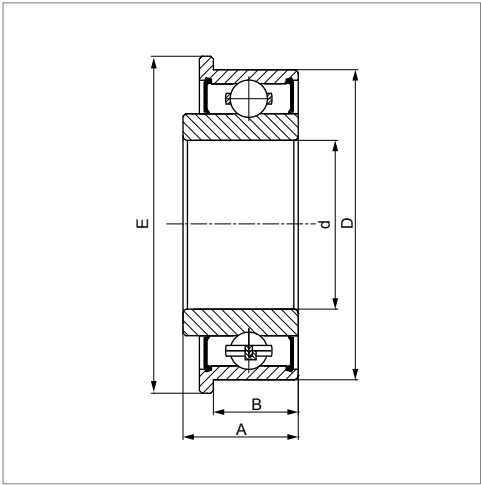

GRI1201 – GRI1203

型号	D	d	A	B	E
GRI1101	30.3	12.7	24.10	21.10	33.325
GRI1102	30.3	12.7	27.43	24.18	33.325
GRI1103	30.3	12.7	31.10	28.10	33.325

型号	D	d	A	B	E
GRI1201	35	12.70	12.95	9.65	38.1
GRI1202	35	15.95	12.95	9.65	38.1
GRI1203	35	19.13	12.95	9.65	38.1

发黑轴承 Bearing for oven



冲压轴承 Stamping bearing



车库门轴承 Garage door bearing



聚氨酯轴承 Urethane bearing



滑轮组 Sliding roller trolley



卫浴滑轮组 Shower roller set

